531894

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
6 May 2004 (06.05.2004)

PCT

(10) International Publication Number
WO 2004/037668 A1

(51) International Patent Classification[7]: B65D 33/36

(21) International Application Number: PCT/SE2003/001629

(22) International Filing Date: 22 October 2003 (22.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0203130-0 24 October 2002 (24.10.2002) SE

(71) Applicant *(for all designated States except US)*: **ASEPT INTERNATIONAL AB** [SE/SE]; Glimmervägen 8, S-224 78 Lund (SE).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **DRENNOW, Sten** [SE/SE]; Östervångsvägen 4, S-224 60 Lund (SE).

(74) Agents: **WAGNER, Heinz** et al.; H. Wagner & Co AB, Norra Vallgatan 72, S-211 22 Malmö (SE).

(81) Designated States *(national)*: AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: A SPACER AT A CONNETING DEVICE

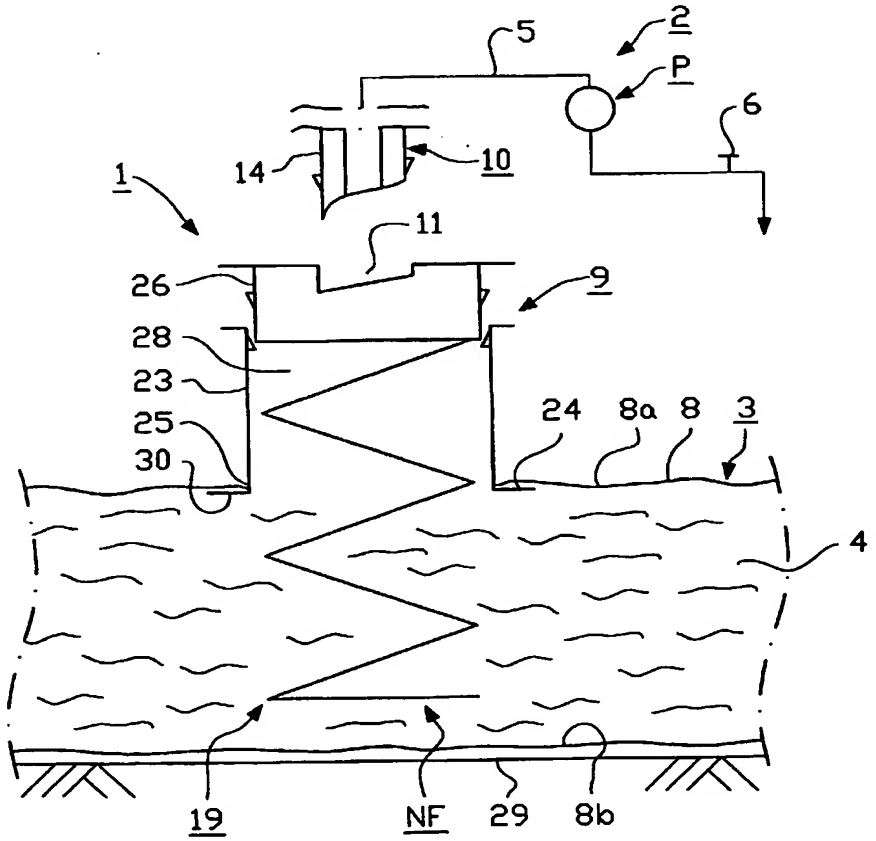

(57) Abstract: The present invention relates to a spacer at connecting devices which are adapted to connect discharge devices (2) to packages (3) with liquid products (4), preferably foodstuff products, for discharging said products (4) from the packages (3). The spacer (19) is provided on a connecting means (26) and is adapted to be located in the package (3) in order to, during emptying of said package, keep wall portions thereof at a distance from a connecting device (1) such that said wall portions do not prevent or substantially obstruct emptying of the package (3). The spacer (19) has resilient properties and can be pressed into a space (28) in a tube member (23) and spring back to a normal shape (NF).

WO 2004/037668 A1

SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.